SensoNODE™ Gold   Analog Connector

Transmitter Technical Data

| Base Material	Aluminum
Housing Material	Polycarbonate
Accuracy	0.5% (additive to source)
Resolution	0.1%
Temperature Range with Wired Power	-40˚F-185˚F
Temperature Range with Battery	-4˚F-158˚F
Full Range Life Cycles	> 1 million
Certifications	FCC, IC, CE
Battery (Panasonic is recommended brand)	CR123A
IP Rating	IP65

Features:

- Connects inline with any 4-20mA Sensor
- Integrates hard wired sensors into wireless Voice of the Machine Software
- Does not require reprogramming of existing control system
- Definable mapping feature in Cloud to present 4-20mA signal in user defined units
- Magnetic base for tool free mounting
- Threaded stud port provides alternative mounting options where magnetic base is not suitable
- Requires connection cable SCK-400-xx-xx in conjunction with transmitter and 4-20mA Sensor

SensoNODE™ Gold — Analog Connector
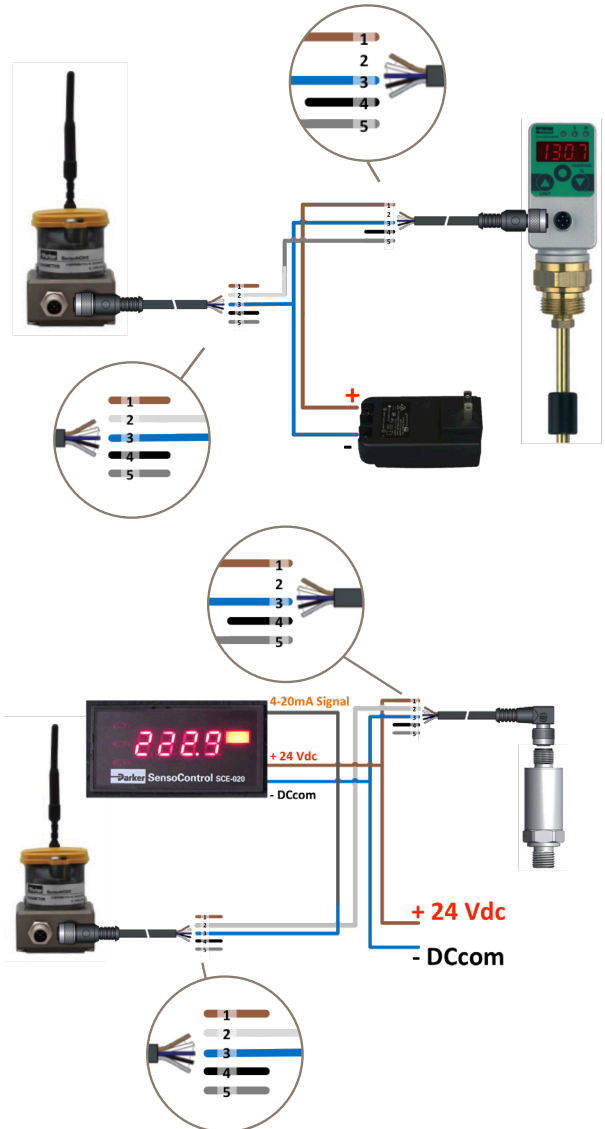
4-20mA

4-20mA Transmitter (Battery Powered)
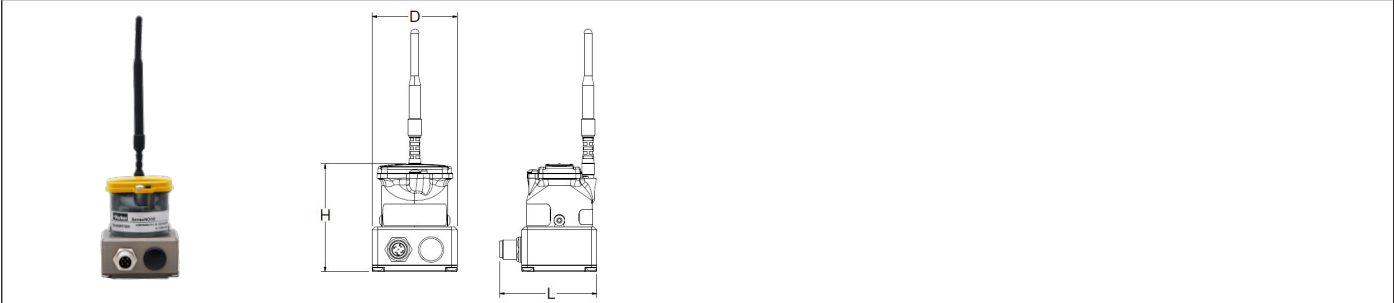
Part Number	Base Mounting Thread	D	H	L
SN322-2	1/4-28 UNF x0.45" [11mm]	2.11" [54mm]	2.67" [68mm]	2.41" [61mm]

warning
⚠ WARNING The products listed can expose you to chemicals including Lead, which is known to the State of California to cause cancer, and to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Parker Hannifin Corporation
Quick Coupling Division
Minneapolis, MN
parker.com/conditionmonitoring